

# INON

## ARM II System

### Direct Base III

#### Features

The Direct Base III adds INON Arm II compatible ball joint on combined strobe, Grip Base D4/M1 to attach on an arm, base or camera system.


Together with optional accessory, it is also attached on Stick Arm Body/Multi Ball Arm Body, X-2 Housing, Grip Bar III Set or Holder II.

The Direct Base III has metal ball joint which provides reliable and faultless installation only by lightly clamped.


#### How to attach

##### ● When installing on compatible arm/base/camera system (compatible product directly accepts this product)


① Attach supplied Rubber Spacer.

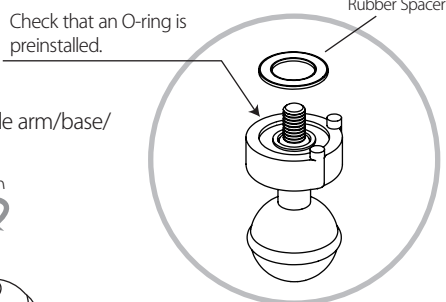

② Screw on compatible arm/base/camera system.

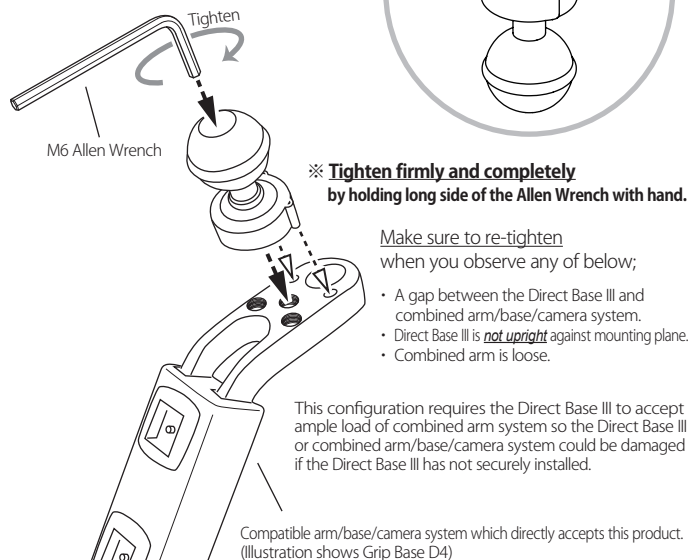

Rubber Spacer

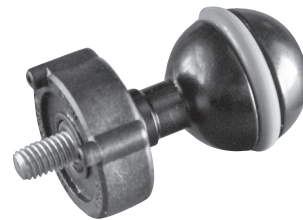

#### Specifications

Package contents Direct Base III x 1

(M6 Cap Screw x 1, M6 Spring Washer x 1, and O-ring x 1 are preinstalled), Rubber Spacer x 1, Spare O-ring x 1, M6 Allen Wrench x 1

Material

Corrosion resistant aluminum alloy, Polycarbonate, stainless, rubber

Dimensions

φ27.5mm (Max.) x 45.1mm(H), φ1.1" x 1.8" (H), Effective length 32mm(1.3")

Weight

34.9g (air) / approx.23g (u/w) 1.2oz (air) / approx.0.8oz (u/w)

Compatible strobe

D-2000, D-2000S, D-2000W/Wn, D-180, D-180S, Z-240, Z-220, Z-220S, Z-220F, S-2000

Compatible arm/base/camera system etc.

- Directly attached \*1
    - Grip Base D4, Grip Base M1, D Holder, D Holder Extension Bar, Port Arm for MRS, Port Arm for UFL-MR130 EFS130, Tripod Adapter
  - Via optional 「M6 Joint」 \*5
    - Stick Arm XS/SS/S/M/L Body, Multi Ball Arm S/ML/L/LL/XL Body
  - Via optional 「M6 Plate Direct Base III」 \*5
    - X-2 Series Housing, X1-Z/NZ/LZ Housing, Holder II, Grip Bar III Set, Holder II Grip Set, Holder Base, Grip Bar Set, Grip Bar II Set, Grip Base DIII, Grip Base DII, Other brands' housing/arm system (M6) \*2\*4
  - Via optional 「M5 Plate Direct Base III」 \*5
    - Other brands' housing/arm system (M5) \*3\*4
- \*1 In combination with optional 「Washer Set (Direct Base III both sides mounting)」 \*5, maximum two (or four) 「Direct Base III」 can be directly attached\*\*.  
 \*\*For "Port Arm" products. \*\*Except for "Tripod Adapter".  
 \*2 Compatible with 2 x M6 screw holes with 8mm or more depth and 13mm ~ 28mm center-to-center distance of screw holes.  
 \*3 Compatible with 2 x M5 screw holes with 6mm or more depth and 24mm ~ 28mm center-to-center distance of screw holes.  
 \*4 INON INC. has not confirmed compatibility with specific product(s) from other manufactures. Before using, make sure to check if the product(s) from other manufactures is compatible and does not interfere other combined product(s)  
 \*5 When installing on an optional product, it is necessary to attach supplied Rubber Washer, attach a "Washer" (which comes with the optional product) on removed preinstalled M6 Cap Screw/M6 Spring Washer/O-ring then reinstall them again. Make sure to keep all of supplied parts even you do not need them for current system.  
 When installing this product via other optional accessory, refer to respective user manual.

##### ● When installing on compatible strobe

