

NA - D6

For Nikon D6 DSLR Camera

PN 17225

User Manual
Housing
DSLR

Introduction	2
Package Contents	2
Important Instructions	3
Part Names and Functions	4
Opening the housing	7
Closing the housing	8
Preparation for Use	9
Recommended Accessories	14
Care/Storage	15
Warranty	16
Specifications	17



INTRODUCTION


Thank you for purchasing this Nauticam product.

Before using the product, please read this manual thoroughly to familiarize yourself with full scope of functions on the product as well as ensuring that you will use the product correctly.




PACKAGE CONTENTS

Make sure that you have all the included items listed below before using this product.
If some items are missing or damaged, contact your local Nauticam dealer.




NA-D6


(1 x Manual LED Flash Trigger, 2 x Handles with Mounting Balls, 1xHousing Cap, 2 x Optical Fiber Mount Caps, 2 x Stainless Steel Handle Brackets)




Padded Travel Case



Allen key set




Lubricant




Panasonic CR2032 Battery

(pre-installed for Moisture Alarm)




Spare Main O-ring

After purchase, we suggest that you reuse all packaging materials for future travelling.



O-ring Remover



Manual Instruction Card

IMPORTANT INSTRUCTIONS

1

Water-tight test of the housing (without camera inside) before usage is recommended as well as any O-ring renewal and port change.

2

Do not seal the housing when travelling by air as this may lead to a pressure difference between the atmosphere and inside the housing.

3

Only the accessories specified by Nauticam must be used. Third-party accessories may result in malfunctions or damage to the product.

4

Use only Nauticam lubricant on silicone rubber O-ring.

5

Do not stretch any O-rings excessively. Only remove it using Nauticam O-ring remover.



6

Discontinue use immediately when there is a sign of leakage.

7

Do not attempt to remove parts of the housing yourself. Repairs must be done at authorized service centers only.

8

The housing should be positioned on the a stable and safe surface on land.

9

Do not expose the housing in direct sunlight for a prolonged period.

10

Do not open the housing in wet or sandy environment. Protect the housing from moisture and debris in order to prevent malfunction or leakage.

11

Prevent any sand or dust or water penetration inside the housing. Be extra careful when changing lens and inserting or removing the camera.




12

This product is not intended for use by children, or persons with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they are supervised and/or given instruction by a responsible person concerning use of the product to ensure that they can use it safely.

PART NAMES AND FUNCTIONS


Rear View

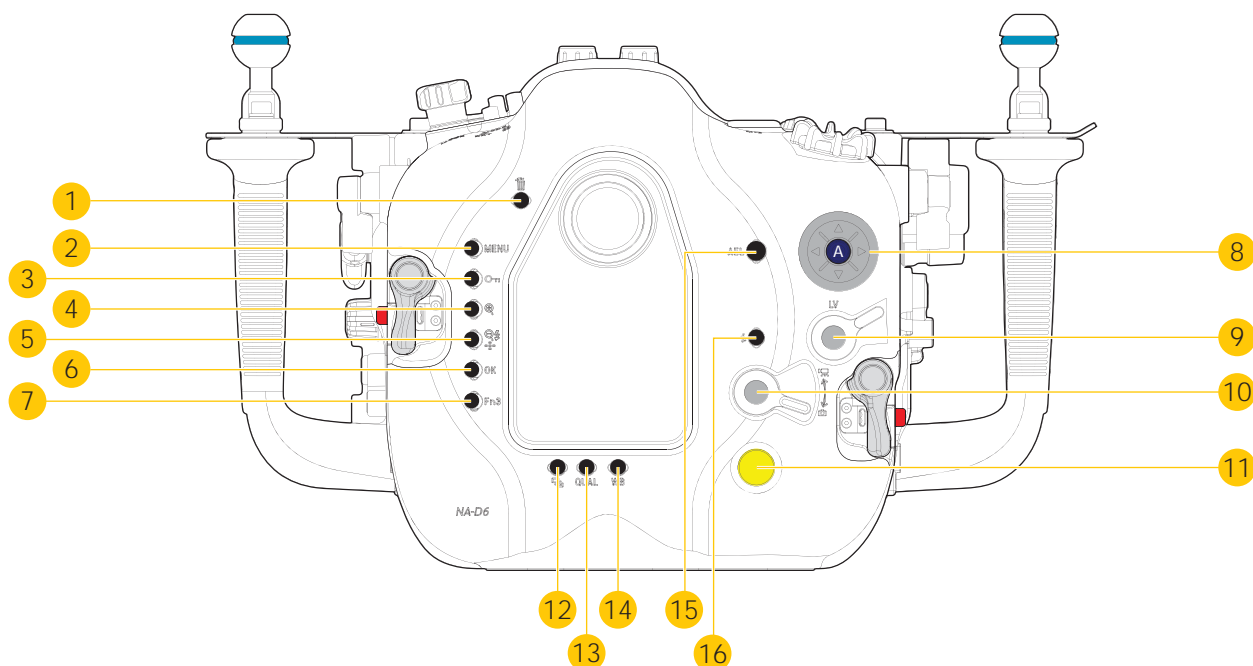

- | | |
|-----------------------------|----------------------------|
| 1 Delete button | 2 Menu button |
| 3 Picture control button | 4 Zoom (in) preview button |
| 5 Zoom (out) preview button | 6 OK button |
| 7 Fn 3 button | 8 Multi selector |
| 9 LV lever | 10 Live view selector |
| 11 Moisture alarm window | 12 Release mode button |
| 13 QUAL button | 14 WB button |
| 15 AEL button | 16 Info button |
| A Multi selector - center | |

PART NAMES AND FUNCTIONS


Top + Front Views

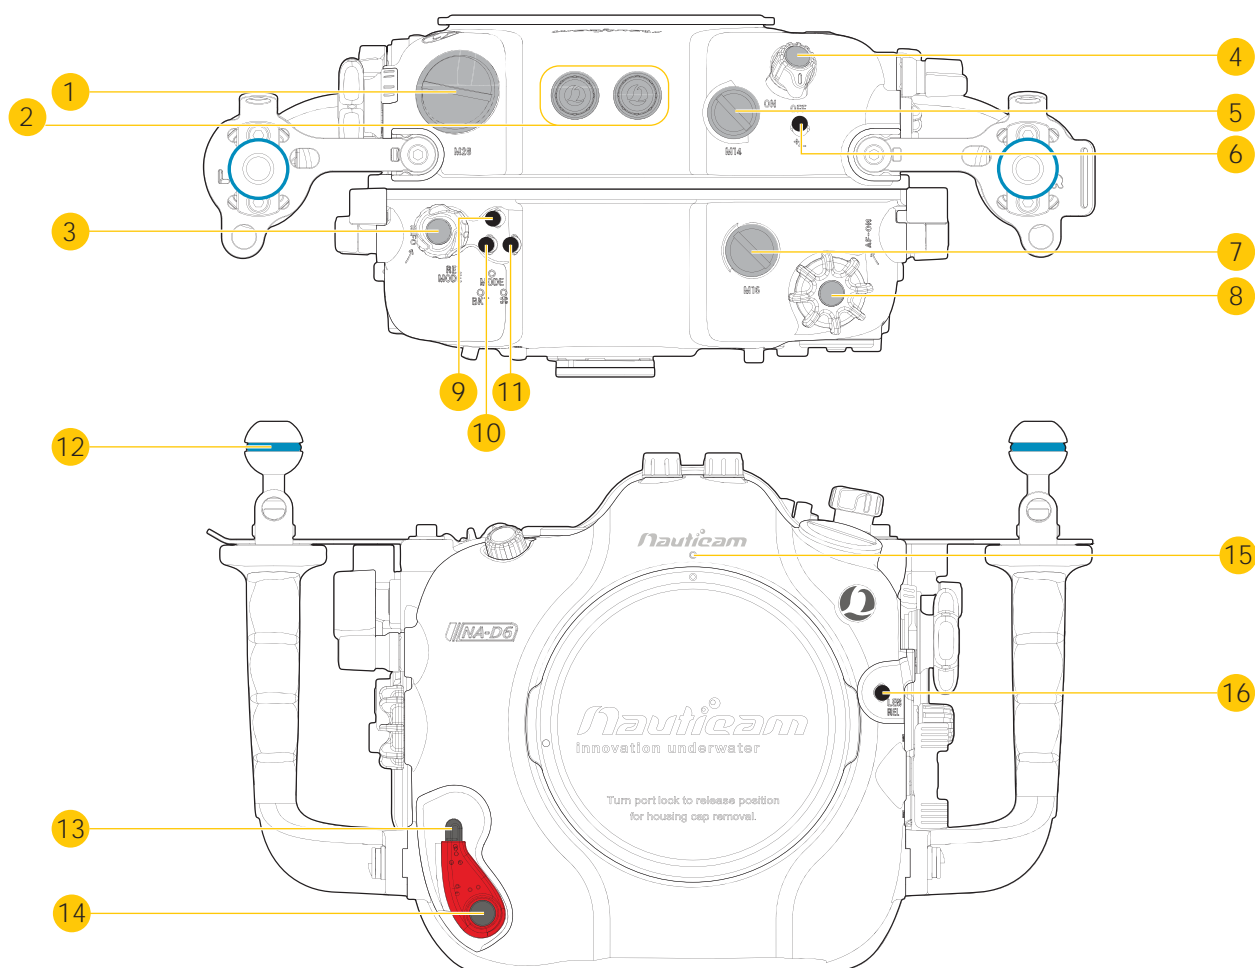

- | | |
|----------------------------|----------------------------------|
| 1 M28 Accessory port | 2 Optical fiber cable connection |
| 3 Release mode dial | 4 Main switch |
| 5 M14 Accessory port | 6 Exposure compensation button |
| 7 M16 Accessory port | 8 Main command dial |
| 9 Mode button | 10 BKT button |
| 11 Metering button | 12 Accessory mounting ball |
| 13 Port lock safety button | 14 Port locking lever |
| 15 Port index mark | 14 Lens release button |

PART NAMES AND FUNCTIONS

Back + Side Views

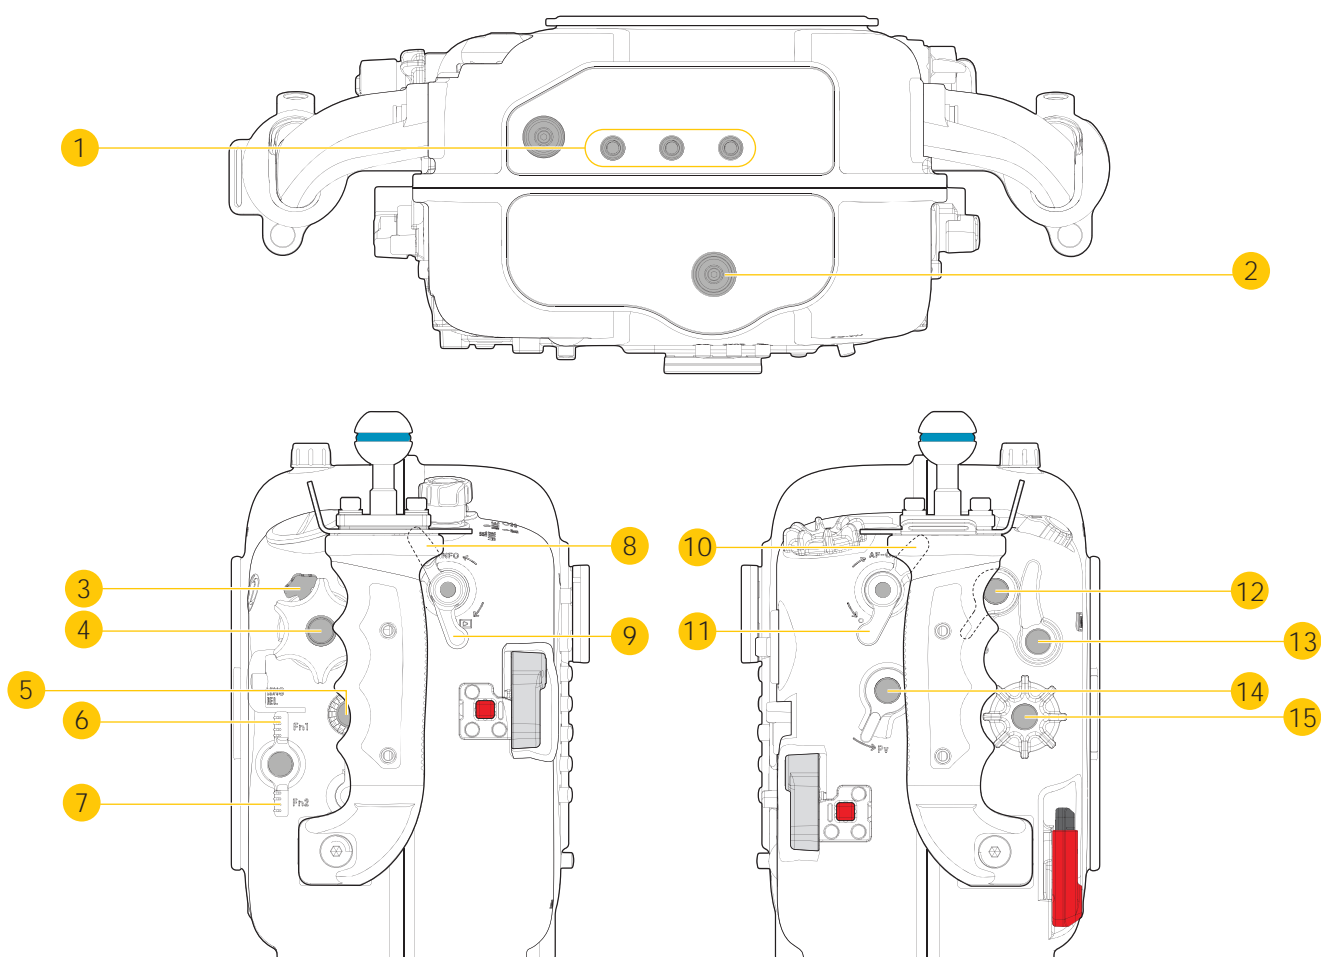


- 1 1/4" Threaded tripod holes
- 3 Zoom/Focus knob release
- 5 AF-mode lever
- 7 Fn 2 lever
- 9 Playback lever
- 11 Movie record lever
- 13 Shutter release lever
- 15 Sub-command dial

- 2 Zinc Anodes
- 4 Zoom/Focus knob
- 6 Fn 1 lever
- 8 Info lever
- 10 AF-ON lever
- 12 ISO lever
- 14 PV lever

OPENING THE HOUSING


* drawings as illustrations only

1

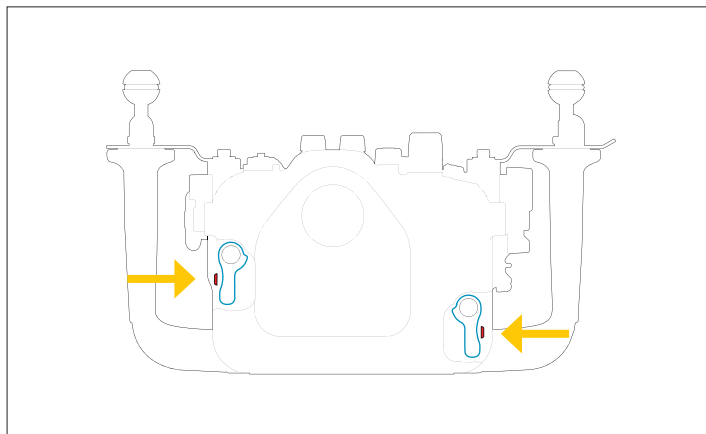


depress housing unlock button

2

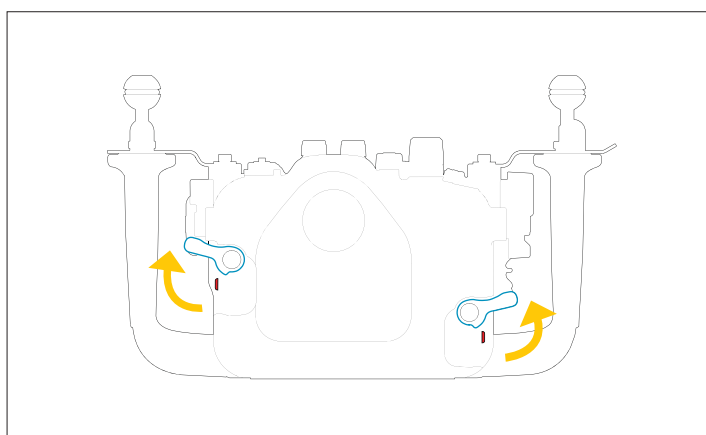

turn housing lock outward

3

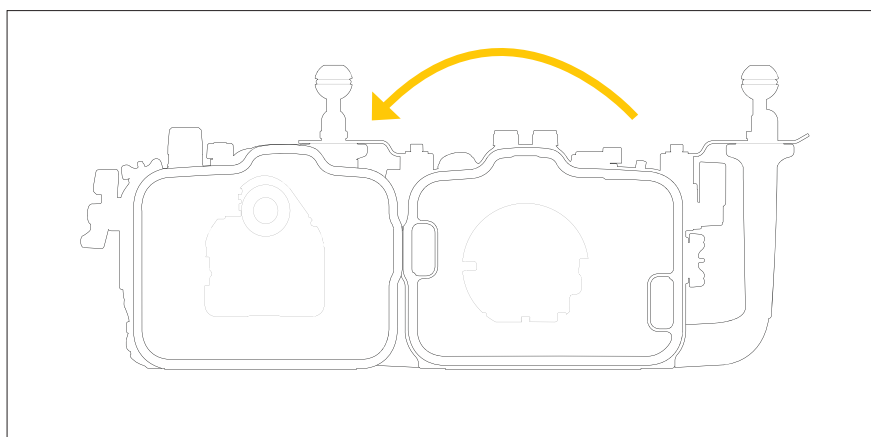


lift up the back housing

CLOSING THE HOUSING

* drawings as illustrations only


1

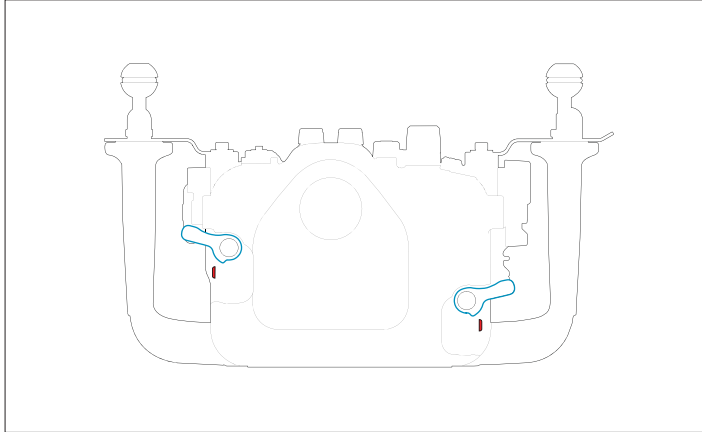

before closing the housing, clean and lubricate the main O-ring


make sure nothing is caught between front and back housing and that they are fully aligned before locking

2

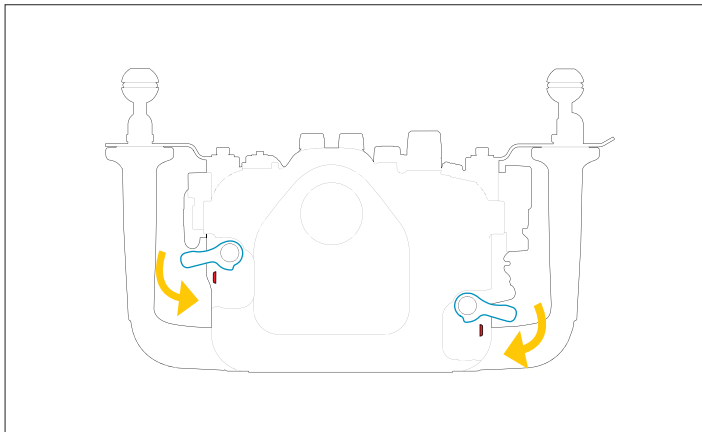

turn housing lock inward until you hear and feel it click into place

3

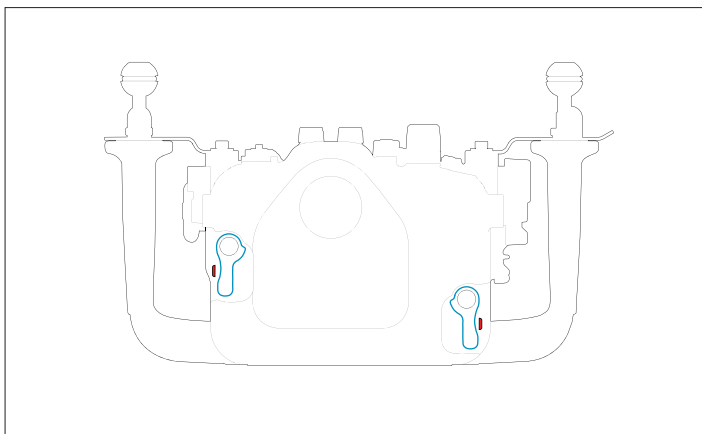


housing locked in place securely

PREPARATION FOR USE

* drawings as illustrations only


Installing the Camera - housing tray attachment

1

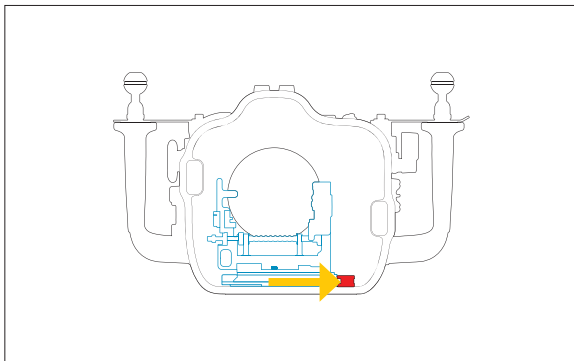

unlock camera tray lever and
remove the tray from the housing


2

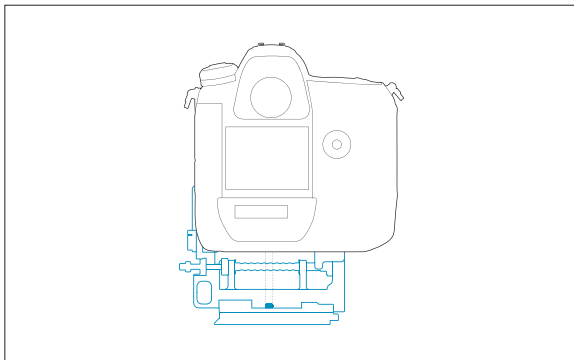

attach the camera tray by tightening
the tray screw into the tripod socket
of the camera

make sure the camera buttons are
engaged with the camera tray

3

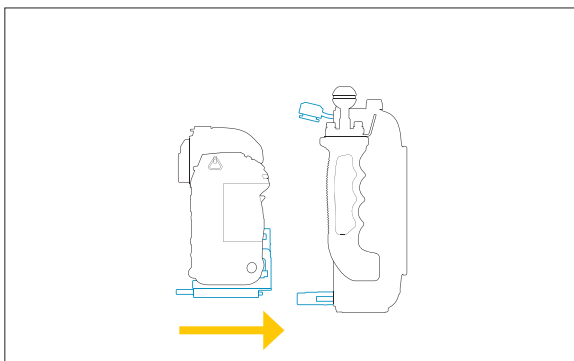


** pull out the zoom/focus knob if
installing the camera with lens and
gear attached*

** please refer to page 10 for lens
installment before sliding in the
camera*

slide the camera tray back into the
housing along the tray rail
then slide the hotshoe plug of flash
trigger PCB into the hotshoe of the
camera

4

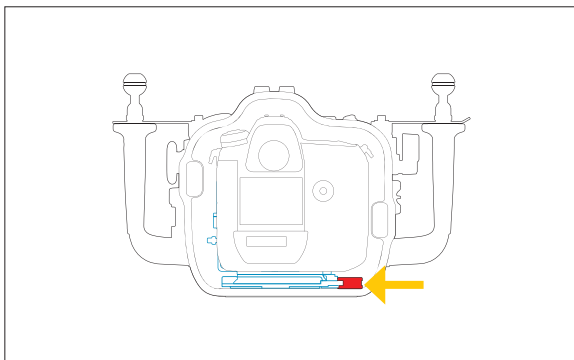

lock camera tray


** place the zoom/focus knob in
place and make sure it is engaged
with lens gear*

PREPARATION FOR USE

* drawings as illustrations only


Port Mounting

1

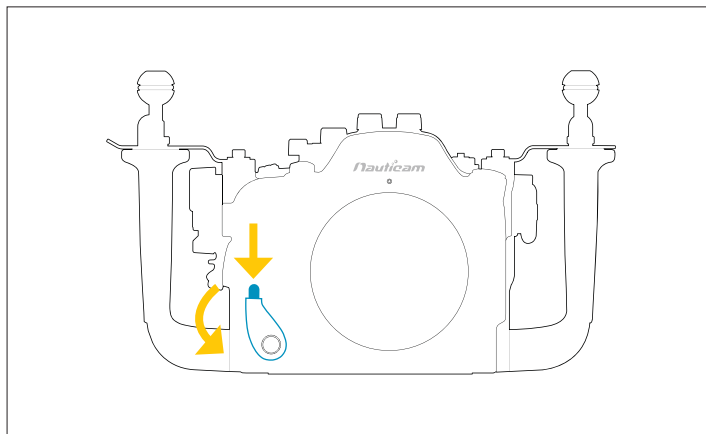

depress safety button and rotate anti-clockwise

2

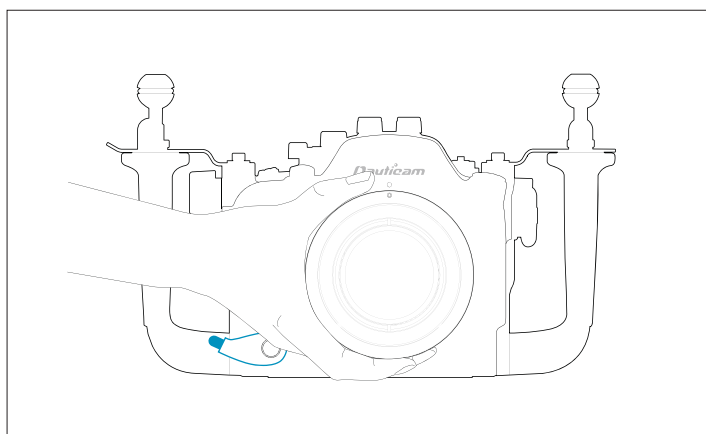


lubricant the port O-ring before mounting

align index mark

push port assembly straight in

3

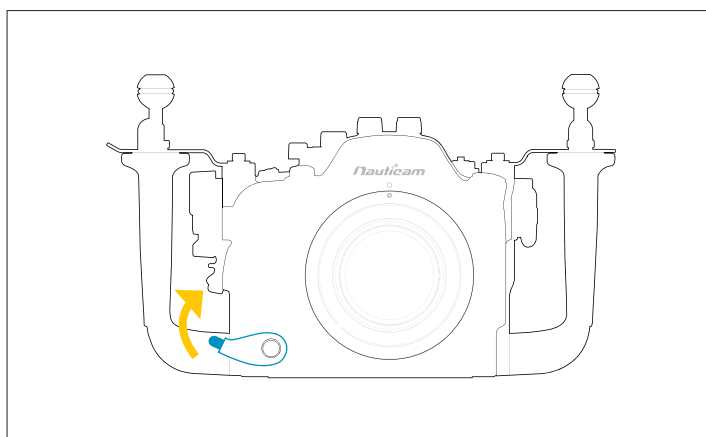


rotate locking lever clockwise to lock

PREPARATION FOR USE

* drawings as illustrations only

Coating housing O-ring

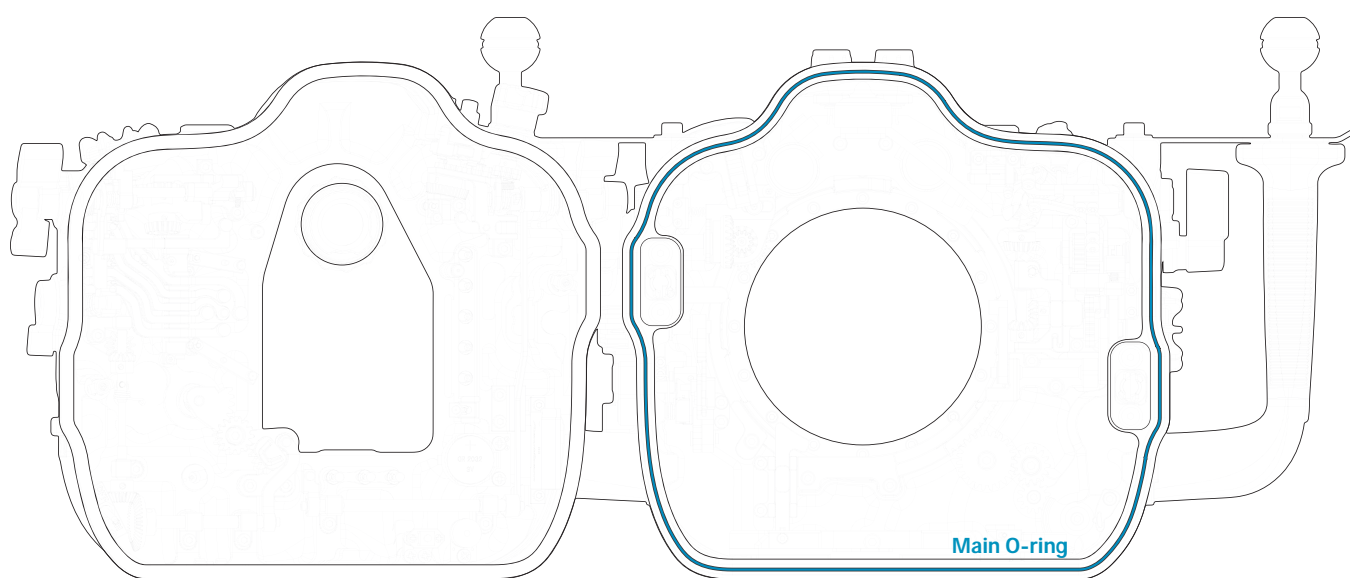

1
remove the main O-ring using an O-ring remover

2
clean the O-ring groove with a cloth and ensure
that it is free from salt or other foreign materials


3
lightly coat it with provided lubricant

4
return the main O-ring by slowly pressing from
one corner to the whole perimeter


PREPARATION FOR USE

* drawings as illustrations only

Setting up moisture alarm

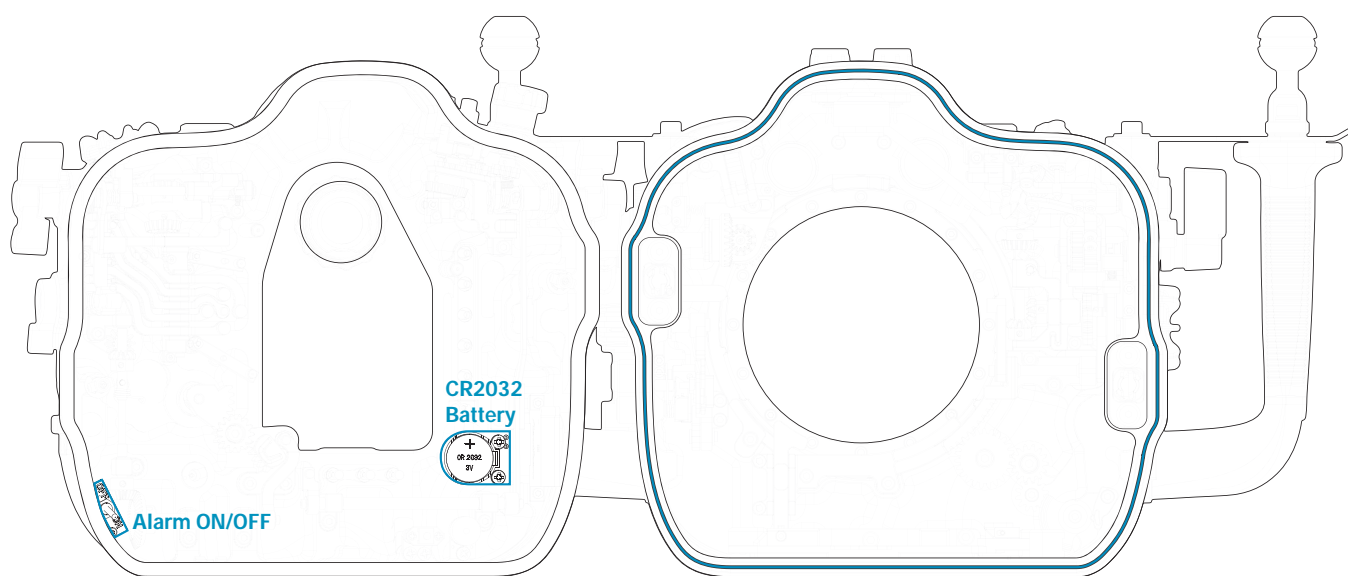


1



remove battery
insulation film

2




press the battery down until it
click into place

3



switch on the alarm
- the moisture alarm
window will flash in
BLUE when it is working
correctly

4



test the alarm
- connect the wires with a
dampened cotton bud; the
alarm will give a repeating
'beep' and the moisture alarm
window will flash **RED**


** please contact our authorized service centers if testing fails
please refer to page 15 for complete vacuum system guidance

PREPARATION FOR USE

* drawings as illustrations only

Changing lens/port without opening the housing

1

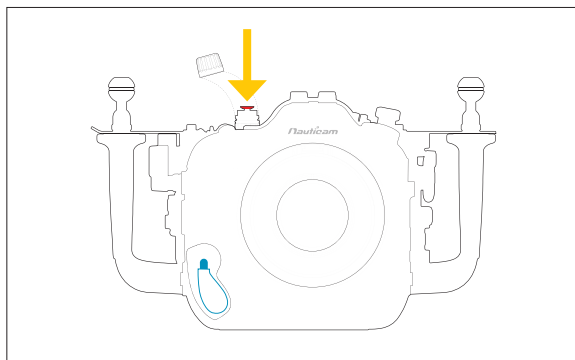


If using with vacuum valve :

remove the cap from the vacuum valve and press the red button to release pressure before unlocking port lock


If using without vacuum valve, please follow from step 2

2

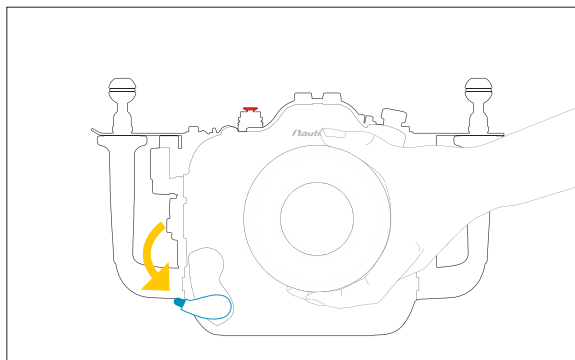


unlock port lock and remove port assembly

3

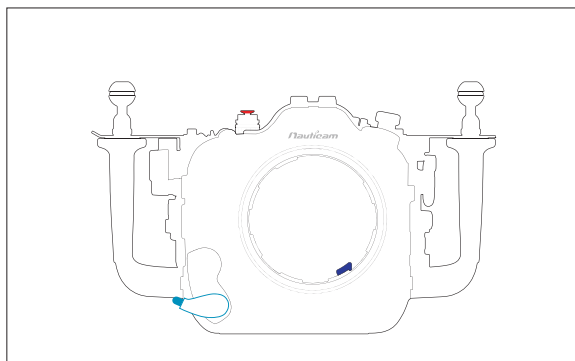

press the blue button to reset vacuum alarm before replacing port

4

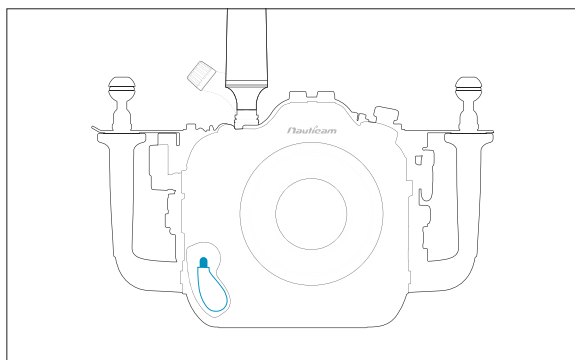


reset vacuum valve system using hand pump then close the cap

** please refer to page 14 on complete vacuum system guidance*


RECOMMENDED ACCESSORY

1

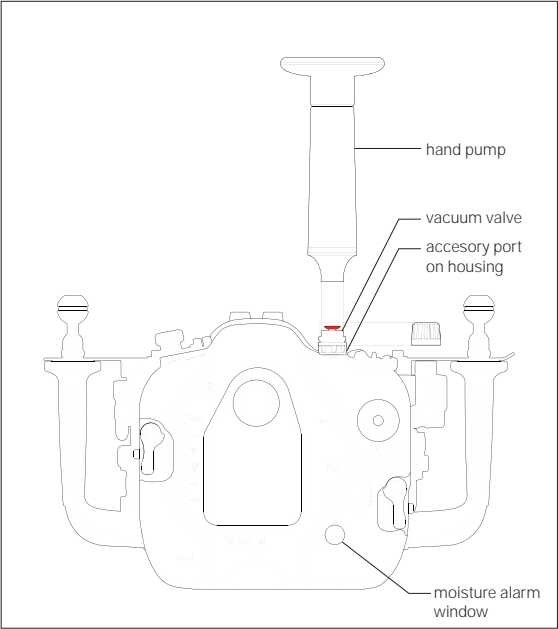

- remove the plug of M16 accessory port from the housing
- remove the cap from the vacuum valve
- slightly lubricate the o-ring and make sure the o-ring is in place
- then tighten the vacuum valve to the housing with the tool provided

2

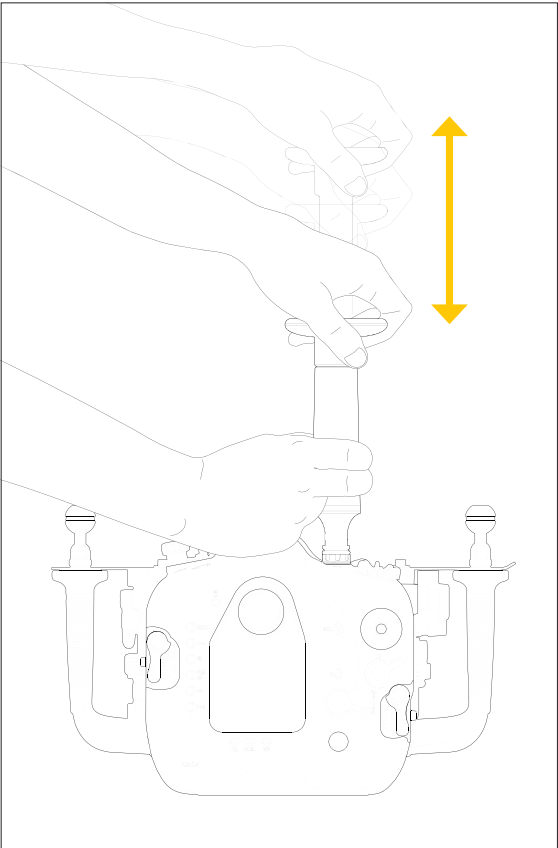

- connect hand pump to the valve and pump several times until it reaches the target vacuum level
- close vacuum valve cap

Moisture alarm window colour indication :

Steady Blue		device is turned on
Flashing Blue		standby mode, ready for pumping
Steady Green		target vacuum level is reached
Flashing Yellow		vacuum level is dropping
Flashing Red		vacuum is totally lost, circuit stalled untill device is switched off
Alternating Blue and Red		vacuum is totally lost, circuit stalled untill device is switched off
Steady Red		out of battery

** It is recommended to leave the housing for at least 20mins to ensure it is sealed. If the LED light changes from steady green light to rapidly flashing yellow light, that means there is a leakage. Please check every O-ring and then conduct the vacuum test again.*

CARE/STORAGE

1

Soak the housing system in fresh water after salt water usage

2

Operate all controls and buttons at least 3 times while immersed in fresh water

3

We recommend cleaning and inspecting the main O-ring each time after diving for any damage and every time the housing is opened.

4

Protect the housing with robust and shock-proof travel case during transportation. Do not travel with camera inside housing.

5

We recommend to ship the housing to our service centers for a complete overhaul after 200 dives/every 2 years.

WARRANTY

All NAUTICAM Housing Products and Viewfinders are warranted against any material and manufacturing defects for two years from the date of purchase for consumer use. NAUTICAM Optical Accessories are warranted against material and manufacturing defects for a period of one year, and HDMI cables carry a year warranty.

This warranty only applies to products purchased from authorized NAUTICAM dealers and does not extend beyond the original retail purchaser.

To return your product for service, please contact your regional authorized service center(s). Please note that this warranty only applies when the product is purchased in the territory where the service center is located.

NAUTICAM accepts no liability for any damage to and defects in the housing caused by improper use and/or poor maintenance; it is the responsibility of the owner to carefully follow the instructions in our manuals.

NAUTICAM does not hold responsibility for damage, of any nature, to any equipment used with and/or placed within our products.

NAUTICAM accepts no liability for any loss of captured images or the inability to capture images even if it is due to the malfunctioning of our products.

Unauthorized modifications and/or repairs of our products will automatically invalidate the warranty.

SPECIFICATIONS

Construction

Housing body	Hard Anodized Aluminium Alloy
Display window	Abrasion Resistant Polycarbonate

Dimensions

Width	368 mm
Height	233 mm
Depth	147 mm

Weight

In air	3.80 kg
In water	-0.05 kg (w/ camera & battery)

Depth

Rating	100 m
--------	-------

Port specifications

Port mount	N 120 Port System
Port accessories	1 x M28, 1 x M16, 1 x M14

HDMI connectivity required accessories (2.0)

25091 M28C1R215-M28A1R170 HDMI 2.0 Cable
25089 M28 Adaptor for HDMI 2.0 Cable

Monitor options

17922/S Nauticam Atomos Ninja V/V-S Housing for Atomos Ninja V 5" (excl. HDMI 2.0 cable)
--

HDMI connectivity accessories (1.4)

25033 Standard HDMI bulkhead with M16 thread
25080 M28-M16 Step Down Adaptor
25036 HDMI (D-C) cable in 190mm length (for connection from HDMI bulkhead to camera)

Monitor options

17920 NA-502B-H housing for Small HD 502 5-inch Bright monitor
17923 NA-Shinobi-H Housing for Atomos Shinobi 5.2" 4K HDMI Monitor

Ethernet output for remote control

27101 Housing Lemo Bulkhead with Integrated Ethernet Cable in 220mm
27102 Nauticam Ethernet Surface Cable in 45 meter length

Recommended accessories

25625 M16 Vacuum Valve II (pushbutton release)
32201 180° straight viewfinder
32203 45° viewfinder
26308 TTL Converter for Nikon 26216 Universal Optical Fiber Cable
25080 M28-M16 Step Down Adaptor
26074 M14 Nikonos 5-pin Bulkhead with Micro Connector for Nikon TTL Converter
26075 Ikelite Style Bulkhead with Micro Connector for Nikon TTL Converter

Wet Lens Compatibility

Macro	81201	Super Macro Converter 1 (SMC-1, 2.3x magnification)
	81202	Super Macro Converter 2 (SMC-2, 4.0x magnification)
Macro to Wideangle	86201	Macro to Wide Angle Lens 1 (MWL-1)
	87301	EMWL Set#1 (incl. focusing unit #1, 150mm relay lens & 3 objective lenses)
Wideangle	85201	0.36x Wide Angle Conversion Port with Aluminium Float Collar (incl. N120 to N100 port adaptor)
	85204	0.57x Wide Angle Conversion Port 2 with Aluminium Float Collar (compatible with 14mm lenses)

Recommended wet lens accessories

25101 M67 flip diopter holder for M67 macro ports
25108 M67 Double Flip Holder for M67 Macro Ports
83250 M67 to Bayonet Mount Converter II
83251 M77 to Bayonet Mount Converter II
83214 Bayonet Mount Adaptor for SMC/CMC
87501 Flip Holder for EMWL
87513 Shade for 100° Objective Lens
87512 Shade for 130° Objective Lens
87515 M67 Mount to EMWL Focusing Unit
87518 Strobe Mounting Brackets for EMWL Relay Lens

Nauticam Internationl Ltd.

Rm 2203, CCT Telecom Bldg,
11 Wo Shing St,
Fo Tan,
Hong Kong

Tel. +852 - 26902711
Fax. +852 - 26909778
URL. www.nauticam.com
Gallery. www.nauticam.smugmug.com